

Ironman Hybrid Barrier

The Ironman Hybrid Barrier comprises a robust design with concrete ballast to provide low-mid speed project environments a perfect freestanding product that offers great flexibility for staged projects without compromising safety. With a TL-2 rating and ASBAP approval for speeds up to 70 km/h, the Ironman Hybrid delivers unparalleled freestanding performance in speed zones of 60 km/h and 40 km/h. Its lightweight and stackable design makes it a popular choice for many projects, thanks to the transport savings and the capability for unanchored deployment.



Ironman Hybrid Barrier

The world's lightest freestanding unanchored barrier



FEATURES

- ASBAP Approval to 70km/h TL-2
- Freestanding barrier
- Safe redirection
- No anchoring
- Multiple end treatments available
- Maintenance free
- Durable
- Lightweight
- Steel wedge (engineered angle pieces) available for tight radius projects 60km/h approved
- Economical transportation
- Fast deployment and retrieval with a three-man crew


Effective Length	4.15m
Height	813mm
Width	546mm
Weight	925kg
Weight Per Metre	225kg
Successfully Tested To	MASH TL-2
ASBAP Approval To	70km/h
MASH TL-2 Deflection	1.49m

Amount Transportable Per Semi Truck	24 Barriers (99.6m)
Multiple End Treatments Can Be Used	Yes
Lightweight	Yes
Safe Redirection	Yes
Fast Deployment/Retrieval	Yes
Anchoring Required	No
Economical To Transport	Yes
Maintenance Free	Yes
Durable	Yes

SPECIALISED RADIUS SOLUTIONS

Ironman Hybrid Barriers use a steel wedge which are engineered angle pieces that allow deployment on tight radius projects. By placing the Steel Wedge between individual barriers, they can be installed at radii as tight as 10 metres, offering a notable advantage over traditional barrier setups. Some of the benefits include:

- ASBAP approval to 60km/h
- 5 metre design deflection where wedges are used
- Improved efficiency during staged intersection deployment
- No compromise on worksite protection.

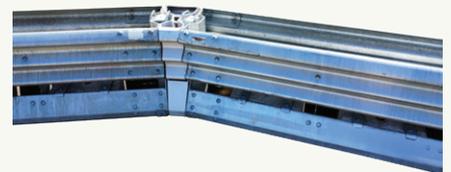

For more information and specialist advice contact your Account Manager or local branch hub on 134040.

