

Rebloc 120 Barrier

The Rebloc 120 Barrier is the only temporary freestanding TL-5 concrete Barrier designed to safely redirect a 36,000kg semi trailer at 80km/h, making it the perfect barrier for ultra-high containment where minimal pinning is preferred.



Rebloc 120 Barrier

Only temporary TL-5 concrete barrier in Australia.




FEATURES

- TL-5 Barrier protection
- Freestanding (only end sections need anchoring)
- Can be used in TL-3 Deployments (with 0.4m deflection)
- Only 1.58m deflection MASH TL-5 impact
- 4780kg per 6m element
- Great for bridge projects with high risk category
- Suits Smart Crash Cushion end treatment

SPECIFICATIONS

Height	1200mm	Test Speed	80km/h
Length	6000mm	Dynamic Deflection	1.58m
Width	620mm	Working Width	2.29m
Weight	4780kg	Installation	Free standing on asphalt or concrete
Material	Concrete	End Anchorage	6 x 20/300mm Excalibur
Test to	MASH TL-5	End Treatment	Smart Crash Cushion
Durable	Yes		
Fast Deployment/ Retrieval	Yes		
Anchoring Required	End barriers only		
Minimum Installation Exposure Time	Yes		
Rapid lane switching	Yes		

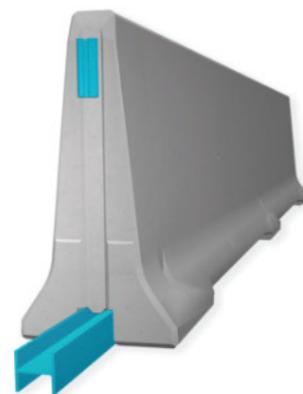

For more information and specialist advice contact your Account Manager or local branch hub on 134040.

